


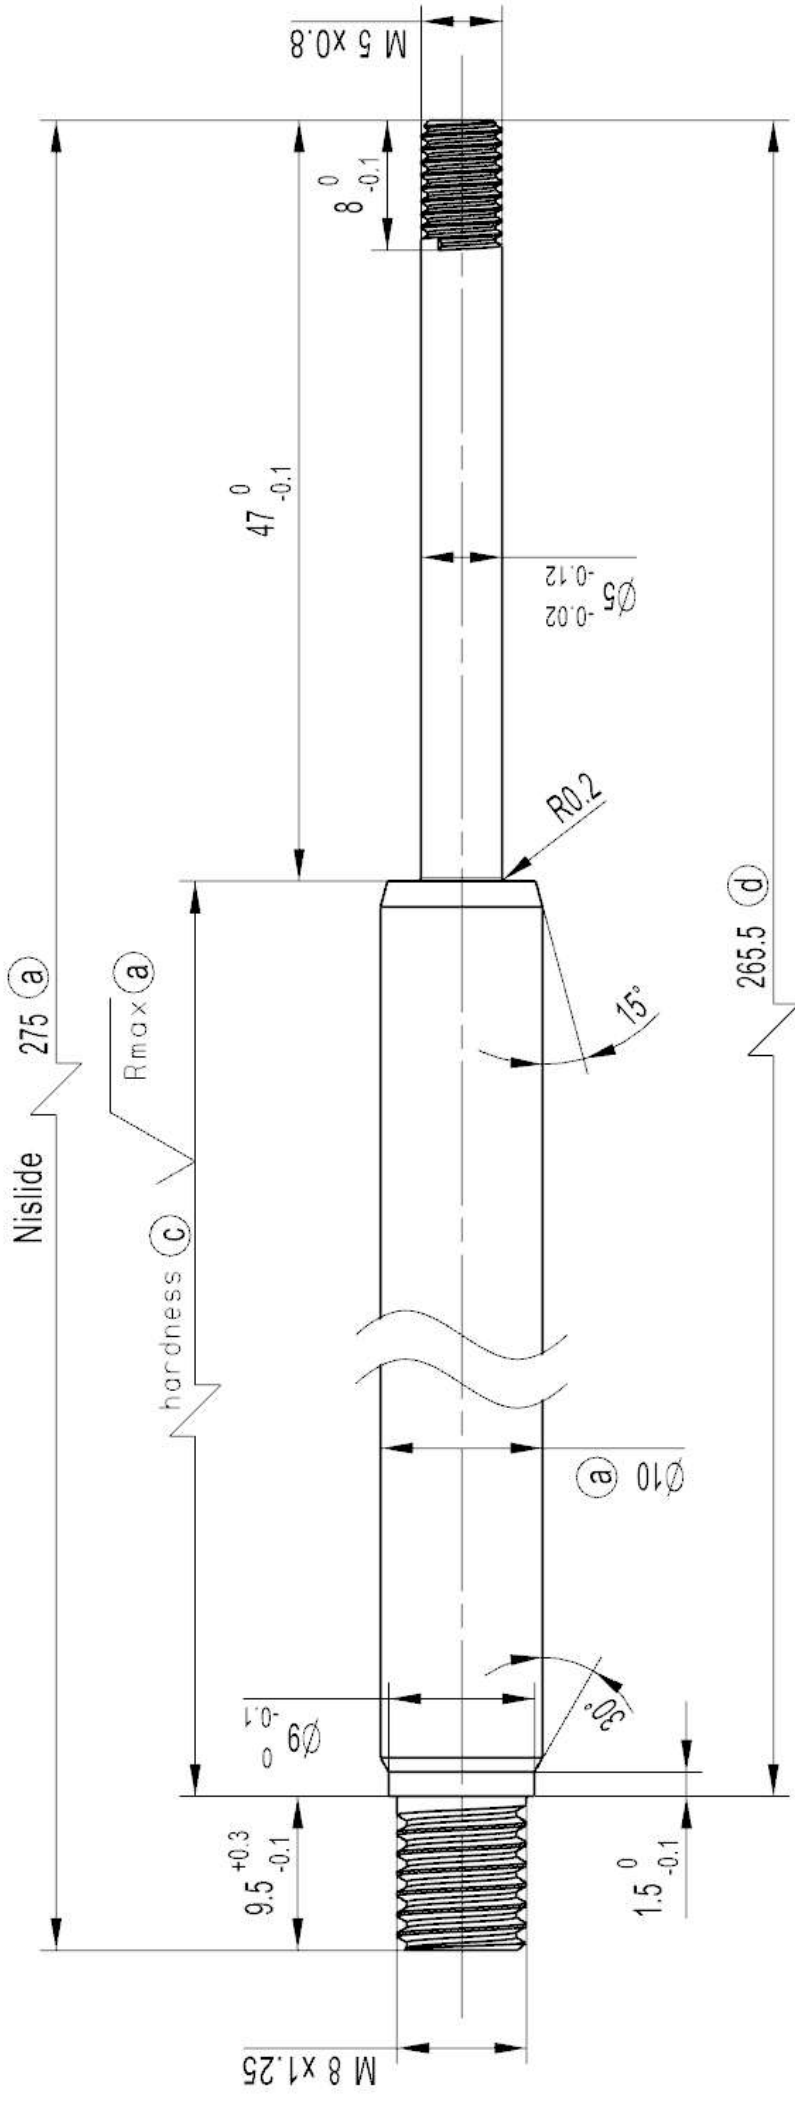

- (a) piston rod processing per STAB-Spec. 10006248
- (c) before grinding:
Hardness depth and hardness test acc. to STAB-Spec. 10258370
- (d) tolerance $\begin{smallmatrix} +0.1 \\ -0.1 \end{smallmatrix}$ after turning
 $\begin{smallmatrix} +0.3 \\ -0.3 \end{smallmatrix}$ after straightening
 $\begin{smallmatrix} +0.3 \\ -0.3 \end{smallmatrix}$ after nisliding
- (g) stud $\begin{smallmatrix} \varnothing 5 -0.02 \\ -0.12 \end{smallmatrix}$
 $\begin{smallmatrix} \varnothing 8 \text{ d12 } \begin{bmatrix} -0.04 \\ -0.19 \end{bmatrix} \end{smallmatrix}$

[illegible]