


		8	
	supp.	material no.	A
	No.	Surface treatment STAB-Spec. 10028959 Tab.I (b)	overall length
F			
	1	560038	108
	2	938377	114
E			
D			
C			
B			

ZS	CN	☒
ZS	RO	☐

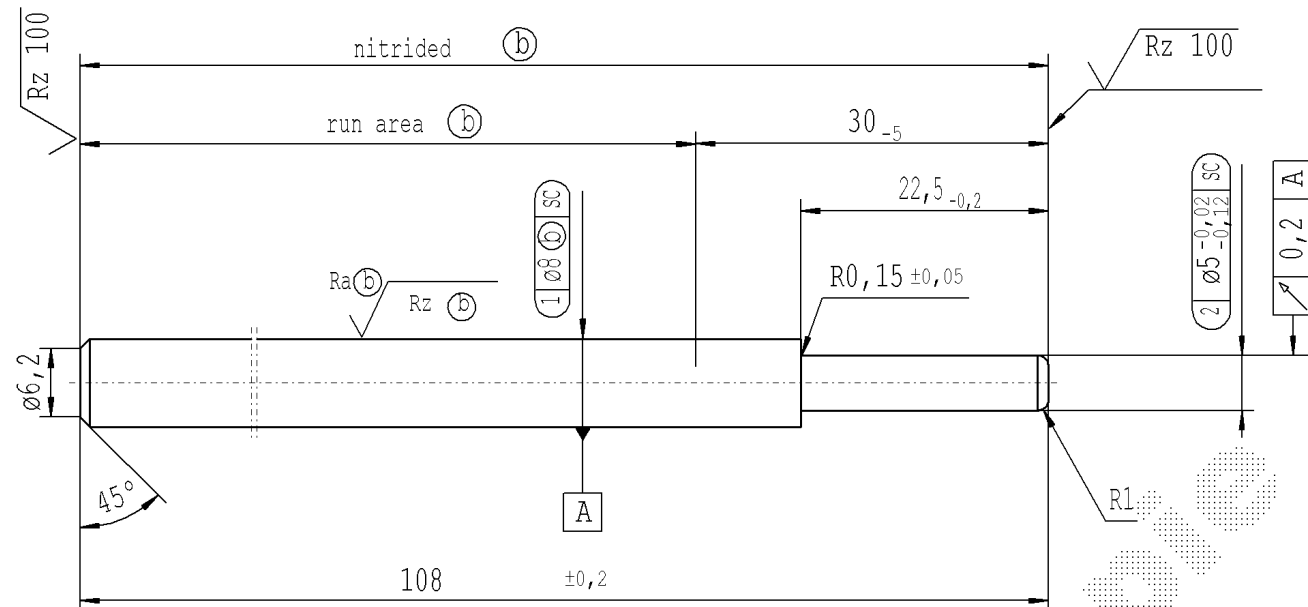

external production * material: 1.1193 S45C JISG 4051

approved lengths: 50-600 mm.

sheet	1
of	1

										AIAG CQI-standards acc. to STAB-Spec. 10027692										Environmental protection acc. to STAB-Spec. 10005649															
DE: X		EN: X		ES:		IT:		PR:		FR:		RO: X		CAD created document handwritten changes not permitted										Material: ★		All dimensions are in mm		Marking of special characteristics according to STAB-Spec. 10270932				Date		Name	
new		Initial Release																						Scale: (Original DIN A3) 2:1		Dimensions without tolerances DIN ISO 2768 mK		Drawn by		08.07.2024		Donat			
old		-																								Checked		08.07.2024		Klinkner					
Field		-																				Edge tolerances acc. to DIN ISO 13715		We reserve all rights to this document, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this document is not permitted without the written consent of STABILUS.		Document No.: 10336574									
Date/Name		08.07.2024 Donat																				Surface finish: DIN EN ISO 1302													
Chg. No.		-																				Replaces:													
Rev.		0																				STABILUS		PISTON ROD		Material No.:									